

8.3.6 WL-2 Warning Light Interface

The WL-2 Warning Light Interface (PR&E #99-143) is an opto-isolated switched AC relay designed to illuminate external studio and/or control room warning lights. This interface has two inputs (STUDIO and CONTROL ROOM), which are activated by 12 volt DC commands. Each input has a corresponding AC output. For a schematic of this interface, see Section 8.4.



NOTE: The WL-2 inputs are polarity sensitive, and will not work unless connected correctly.

A

B

C

D

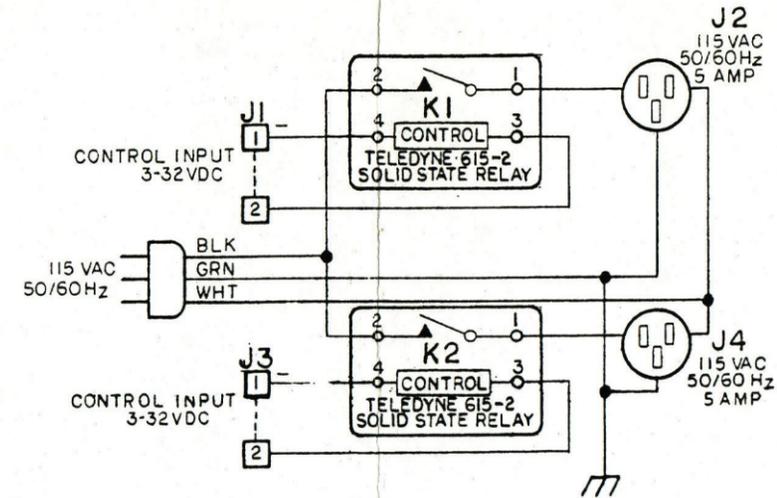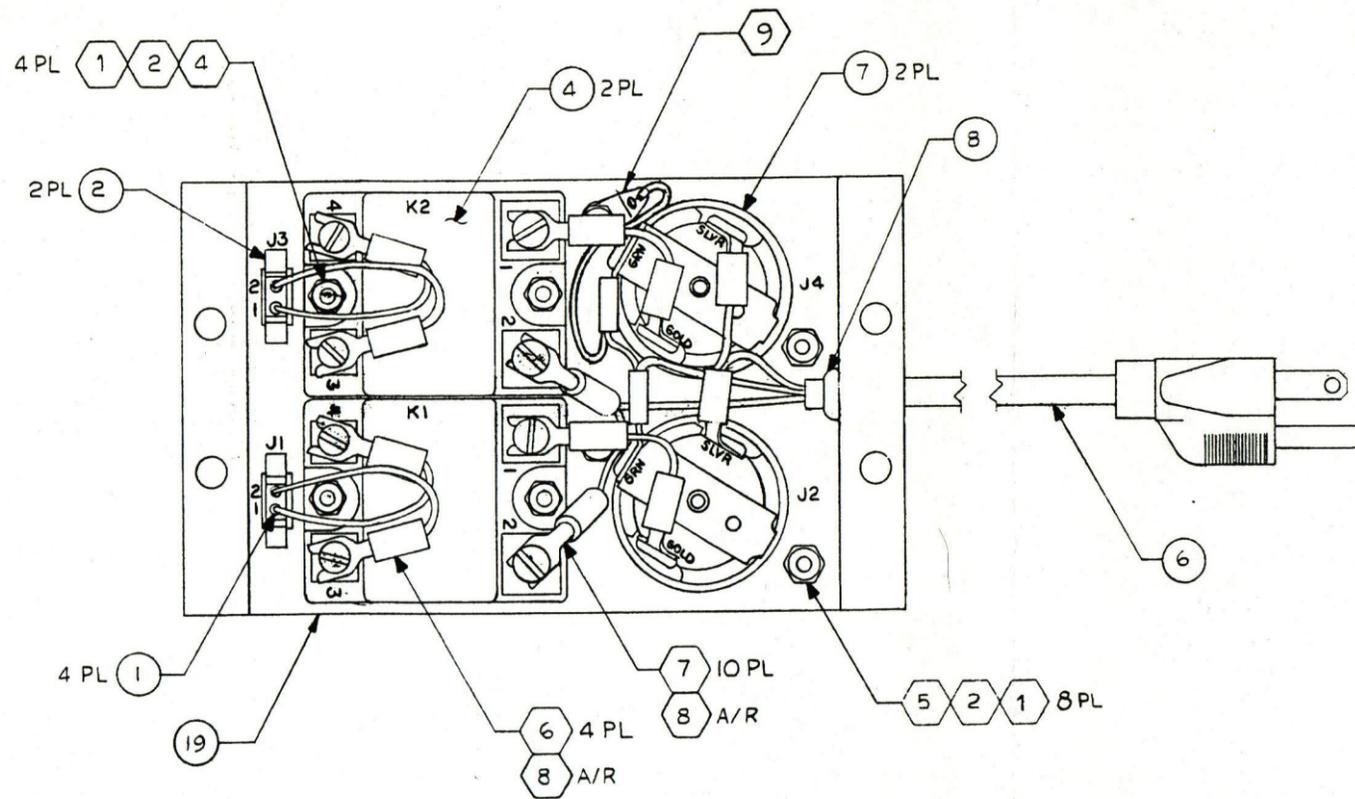

2. [Hexagon symbol] INDICATES ITEMS FOUND ON ATTACHED PARTS LIST
 1. [Circle symbol] INDICATES ITEMS FOUND ON SEPARATE PARTS LIST
 NOTES: UNLESS OTHERWISE SPECIFIED

If You Didn't Get This From My Site,
 Then It Was Stolen From...
www.SteamPoweredRadio.Com

